



C-Band IBUC – High Power Intelligent Block Upconverter

IBUC Advantages

Integrated BUC/SSPA for higher performance and reliability.

All models available with integral AC power supply or separate DC power supply.

Internal 10MHz reference option automatically switches to internal reference when external reference is not available.

Low phase noise exceeds IESS308/309 requirements by a minimum of 10 dB.

NMS-friendly interfaces enable remote management of your earth station RF.

Embedded Web pages provide management for small networks using any Web browser.


AGC or ALC circuits hold gain or output level constant.

16 dB User-adjustable gain in 0.1 dB steps preserves modem dynamic range.

Output sample port included on 100 W and higher power units.

Advanced user interfaces:

- TCP/IP HTTP with embedded Web pages
- SNMP
- TELNET through TCP/IP
- FSK through TX IFL cable
- RS232/485 serial port
- Hand-held terminal

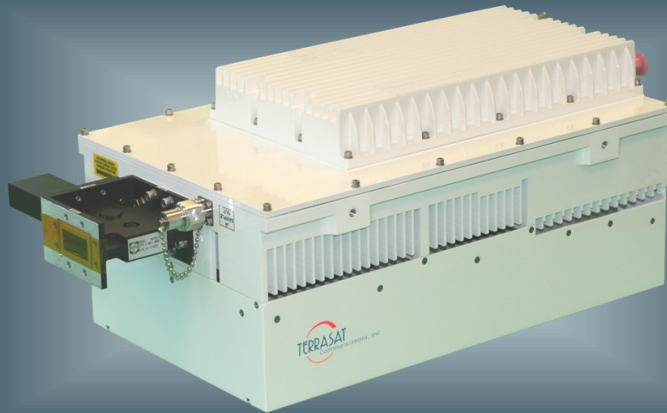

The revolutionary **IBUC** has advanced features to take your network to new heights.

IBUC offers significant benefits:

- Low terminal cost
- Simple design and installation
- Superior RF performance
- Simplified 1+1 configuration

New interfaces connect you to the **IBUC**'s extensive M&C facilities for network management or local access. This powerful new M&C enables:

- **Trouble-free commissioning** with easy, point-and-click installation/configuration
- Continuous **verification** of performance with time-stamped alarm history
- Simplified **troubleshooting** of terminal faults

The **IBUC** comes with a complete set of diagnostic tools including:

- 10 MHz input detector
- Input voltage and current monitoring
- Transmit L-band input level detector
- Transmit RF output level detector
- User configurable thresholds and alarms

Unique to the **IBUC** are internal AGC and ALC functions that satisfy demanding applications with stringent specifications.

For additional information contact Terrasat Sales at +1 408-782-5911 or by Email: Sales@Terrasatinc.com.
235 Vineyard Court, Morgan Hill, CA 95037 www.terrasatinc.com

C-Band IBUC High Power Block Upconverter

Frequency range	RF	IF	SSB Phase Noise	External reference	IBUC
Band 1 Std C-Band	5850 to 6425 MHz	950 to 1525 MHz	10 Hz	-120 dBc/Hz	-40 dBc/Hz
Band 2 Palapa/ST-1	6425 to 6725 MHz	975 to 1275 MHz	100 Hz	-130 dBc/Hz	-70 dBc/Hz
Band 3 Insat	6725 to 7025 MHz	1150 to 1450 MHz	1 kHz	-143 dBc/Hz	-80 dBc/Hz
Band 4 Ext. C-Band	5850 to 6650 MHz	950 to 1750 MHz	10 kHz	-152 dBc/Hz	-90 dBc/Hz
Band 5 Full C-Band	5850 to 6725 MHz	975 to 1850 MHz	100 kHz	-155 dBc/Hz	-100 dBc/Hz
			1 MHz	-155 dBc/Hz	-110 dBc/Hz
VSWR / Impedance	1.5:1 max / 50 Ohm				
Connector	Type N female (50 Ohm)				
Connector options	Type F (75 Ohm), TNC (50 Ohm)				
Input power detector	-55 to -20 dBm				

Gain

Small Signal Gain (L-band to RF) with attenuator set to 0 dB

100W	81 dB min
125W	82 dB min
150W	83 dB min
175W	83 dB min
200W	84 dB min

Attenuator range 16 dB variable in 0.1 dB steps

Gain flatness

Full band	4 dB p-p max
36 MHz	1.5 dB p-p max
1 MHz	0.25 dB p-p

Gain variation over temperature

Open loop	4 dB p-p max
With AGC	1 dB p-p max

RF Output

Interface	CPR-137G or N-f
VSWR	1.5:1 max

Rated output power (P1dB)

100 W	+50 dBm min
125 W	+51 dBm min
150 W	+51.8 dBm min
175 W	+52.4 dBm min
200 W	+53 dBm min

Note: output power in bands 4 & 5 is reduced by 0.5 dB.

IMD3 (2 carriers, 3 dB TOBO)	-27 dBc max
Level stability with ALC	±0.5 dB
Output power detector range	Rated power to -20 dB
Power reading accuracy	± 1.0 dB max.
Spurious	In Band -70 dBc
	Out of Band Complies with EN 301 443 and MIL-STD 188-164
Harmonics	-50 dBc max.
Output Noise Power Density	
	TX < -76 dBm/Hz
	RX < -145 dBm/Hz

External Reference (multiplexed on TX IFL)

Frequency	10 MHz
Level	-12 to +5 dBm
Internal Reference - optional	

Local Oscillator Frequency

Band 1	7375 MHz
Band 2	7700 MHz
Band 3	8175 MHz
Band 4	7600 MHz
Band 5	7700 MHz
Sense	Inverting

IBUC Power Supply

Voltage	DC	± 48 VDC, 42 V min, 60 V max
	AC	100 to 240 VAC , 100W to 125W
		200 to 240 VAC , 150W to 200W

Power Consumption	DC	AC
100 W	700 W	800 VA
125 W	800 W	900 VA
150 W	1056 W	1200 VA
175 W	1100 W	1250 VA
200 W	1150 W	1300 VA

Monitor and Control

FSK (multiplexed on TX IFL), **RS232/485**
Hand-held Terminal, TCP / IP (HTTP, Telnet, SNMP)

Environmental

Operating temperature	-40°C to +55°C
Relative humidity	100% condensing
Altitude	10,000 ft., (3,000 m) ASL

Mechanical

Size	19.5x10x7.8 in. 495x254x198 mm
Weight	32 lbs, 14.5 kg DC powered 33 lbs, 15 kg AC powered

Specifications are subject to change without notice.

C-Band Hi Power IBUC Data Sheet 10/19/10



235 Vineyard Court, Morgan Hill, CA 95037
Tel. +1 408-782-5911 Fax +1 408-782-5912
www.terrasatinc.com